


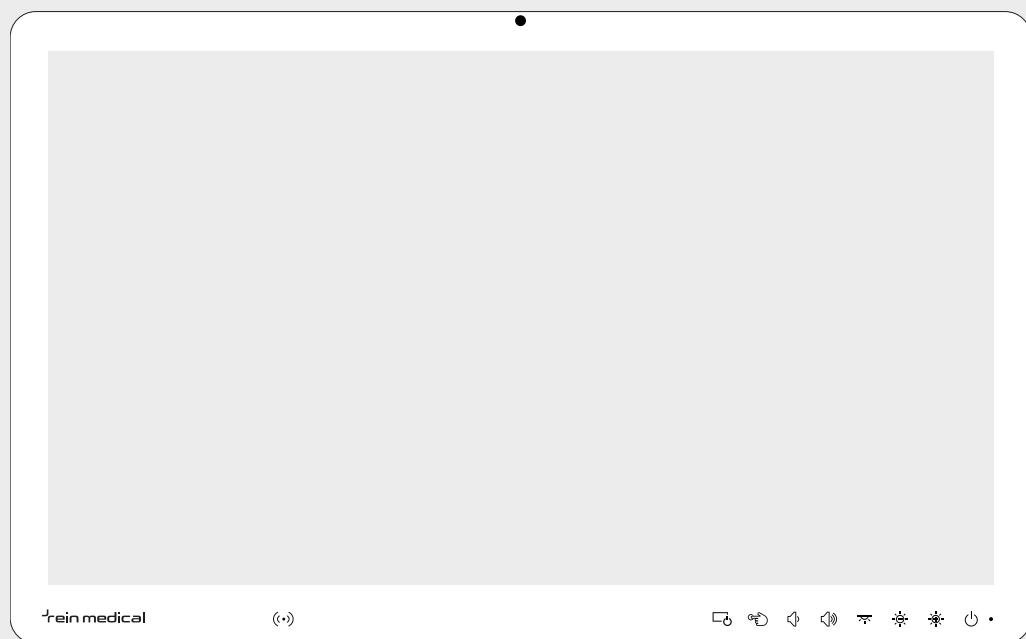

SILENIO C 124

S124C, S124C1, S124CT, S124CT1

DATASHEET

DS-EN-S124C

GENERAL DEVICE DATA

Model description	SILENIO C 124
Item/model number	S124C, S124C1, S124CT, S124CT1
Company name	Rein Medical GmbH
Manufacturer name	Rein Medical GmbH
Type	All-in-One Computer
Application areas	RIS, HIS, PACS, endoscopy, video management
Product dimensions (W x H x D)	367,5 x 587 x 59 mm
Mounting	Compatible with VESA 100 mounting system
Weight	7.80 kg
IP protection type	IP X1 (front side IP 65)
Enclosure material	Antimicrobial plastic
Glass type	Protective glass
Anti-reflective coating	optical, AR 95% (with touch display: optical, AR 89%)
Touch display	Optional capacitive multi-touch display (PCT) 10 point
Controls	COMMAND BAR touch control,
COMMAND BAR controls	PC standby,Monitor On/Off,Touch On/Off,Volume +/-,Brightness +/-,Reading light
Webcam	2 MP CMOS
RFID	USB interface supports ISO 14443-A
Reading light	LED reading light
Enclosure colour	RAL9010/pure white (special colours at customer request, see supply documents)
Mean time between failures (MTBF)	30,000 hours
Warranty	2-year bring-in warranty

POWER SUPPLY

Power supply	AC 100 – 240 V ±10% (50/60 Hz)optional 12 V DC input (4 pin XLR) for external power supply unit
External power supply unit	External 24 V power supply unit (Delta MDS-090AAS24 B)
DC output	-

POWER CONSUMPTION

Standby mode	1 VA
Switched off	0 VA

ENVIRONMENTAL CONDITIONS DURING OPERATION:

Temperature	0 to 40° C
Humidity	0 to 90% RH (non-condensing)
Shock resistance (in operation)	1.5 Grms, IEC 60068-2-64, Radom, 5-500Hz, 30 min/axis

ENVIRONMENTAL CONDITIONS FOR STORAGE/TRANSPORT:

Temperature	-20 to +60° C
Humidity	0 to 90% RH (non-condensing)

PC PROPERTIES

CPU	Intel® Core™ i5 – 6th generation (optional Intel® Core™ i7 – 6th generation)
Chipset	Integrated in Intel® Skylake ULT Processor
RAM	8 GB, optionally up to 16 GB DDR4 2133 SDRAM
Graphics	Intel® HD Graphics HD520, Display port supports up to 4096 x 2304 @60Hz, DirectX 12
Multi-monitor support	Yes
Hard disk	128 GB S-ATA3 SSD (optionally up to 512 GB
LAN	1 x i219LM PHY, 2 x Intel i211AT GbE controller, 2 x isolation LAN intel i210AT GbE controller
Optical drive	-
Audio	Mic-in, Audio speaker (2 x 2 W)
Ports	HDMI, 1 x RS-232/422/485, 1 x RS-232/422/485 (Isolated 5KV), 1 x RS-232, 1 x RS-232 (Isolated 5KV), 4 x USB3.0, 2 x USB2.0 (Isolated 5KV) (reduced throughput rate)
Extension	1 x mini PCIe full size (support half size, auto switch for mSATA, USB, PCIe signal)
Operating system	Microsoft Windows or Linux operating system optionally preinstalled

WLAN PROPERTIES

Wireless network standard	IEEE 802.11a/b/g/n/ac draft 2.0 1T1R
Roaming	yes, (802.11b, 802.11g, 802.11a/b/g, 802.11a/b/g/n, and 802.11ac)
Certificate	Wi-Fi CERTIFIED
Band	Dual Band, 80 MHz
Bandwidth	300 Mbps (2.4 GHz), 867 Mbps (5 GHz) (433 Mbps per stream)
Security/encryption	WPA, WPA2, 802.1x, EAP-SIM, EAP-AKA/64-bit and 128-bit WEP, AES-CCMP, TKIP
WPA specifications	WPA 1/2 PSK (WPA Home), WPA 1/2 801.1x (WPA Enterprise)
Antenna	Integrated 2 x antenna
Radiation pattern:	Omnidirectional
TX/RX streams	2 x 2
Bluetooth module	Intel® Dual Band Wireless-AC 7260
Bluetooth standard	Dual Mode Bluetooth 2.1, 2.1+EDR, 3.0, 3.0+HS, 4.0 (BLE)

DISPLAY PROPERTIES

Display size	60.5 cm (23.8")
Panel technology	Active Matrix LCD-TFT
Visible area (H x W)	527.04 × 296.46 mm
Pixel pitch (H x W)	0.2745 x 0.2745 mm
Viewing angle (V x H)	178°/178°
Maximum panel brightness	250 cd/m²
Contrast ratio	3000: 1
Response time	10 ms (typical), 16 ms (on/off)
Colour range	16.7 million
Colour depth	8 bits
Display norm (VESA)	Full HD (HD1080, 1080p)
Resolution (horizontal x vertical)	1920 x 1080
Aspect ratio	16:9
Backlight	LED
Backlight life	30,000 hours
Pixel defect class	Class II (ISO 9241-307)

STANDARDS

Protection class in accordance with IEC 61140	Class II
EU Conformity	Medical device in accordance with CE (MDD 93/42/EEC), Class I
MDD classification	Class 1 according to 93/42/EEC Annex IX Article 12
UMDNS	Computer (10-977)n/a
GMDN	Computer, desktop (38452)n/a
US conformity	Class I product, Patient: not classified – no applied parts


HYGIENIC PROPERTIES


Quality management	EN ISO 13485, ISO 9001
Product safety	EN 60601-1:2006+A1:2013
Electromagnetic compatibility	EN IEC 60601-1-2:2007
Immunity	EN 61000-4-2, EN 61000-4-3,EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-11
Emission	EN 55011, IEC/CISPR 11:2009 modified, EN 61000-3-2, EN 61000-3-3

MEDICAL SPECIFICATIONS

Security Officer for medical devices in accordance with §31 of the German Act on Medical Devices (MPG)	+49 (0) 216 1 69 84 0 sibemp@reinmedical.com
DIMDI registration number:	DE/CA20/14 - Rein medical - 07/01
Applied part in accordance with EN IEC 60601-1	Type: B
Treatment unit/system in accordance with EN IEC 60601-1	no
Device/system collects patient data in accordance with Federal Data Protection Law	no
Use in explosion-proof areas in accordance with the ATEX directive 2014/34/EU	no
STK/MTK in accordance with §6 of the Medical Devices Operator Ordinance (MPBetreibV)	no specific manufacturer specifications
Radiation protection requirements	none
Manufacturer induction obligation	none required, operating personnel are instructed by the medical technician and the user manual

DIMENSION DRAWING

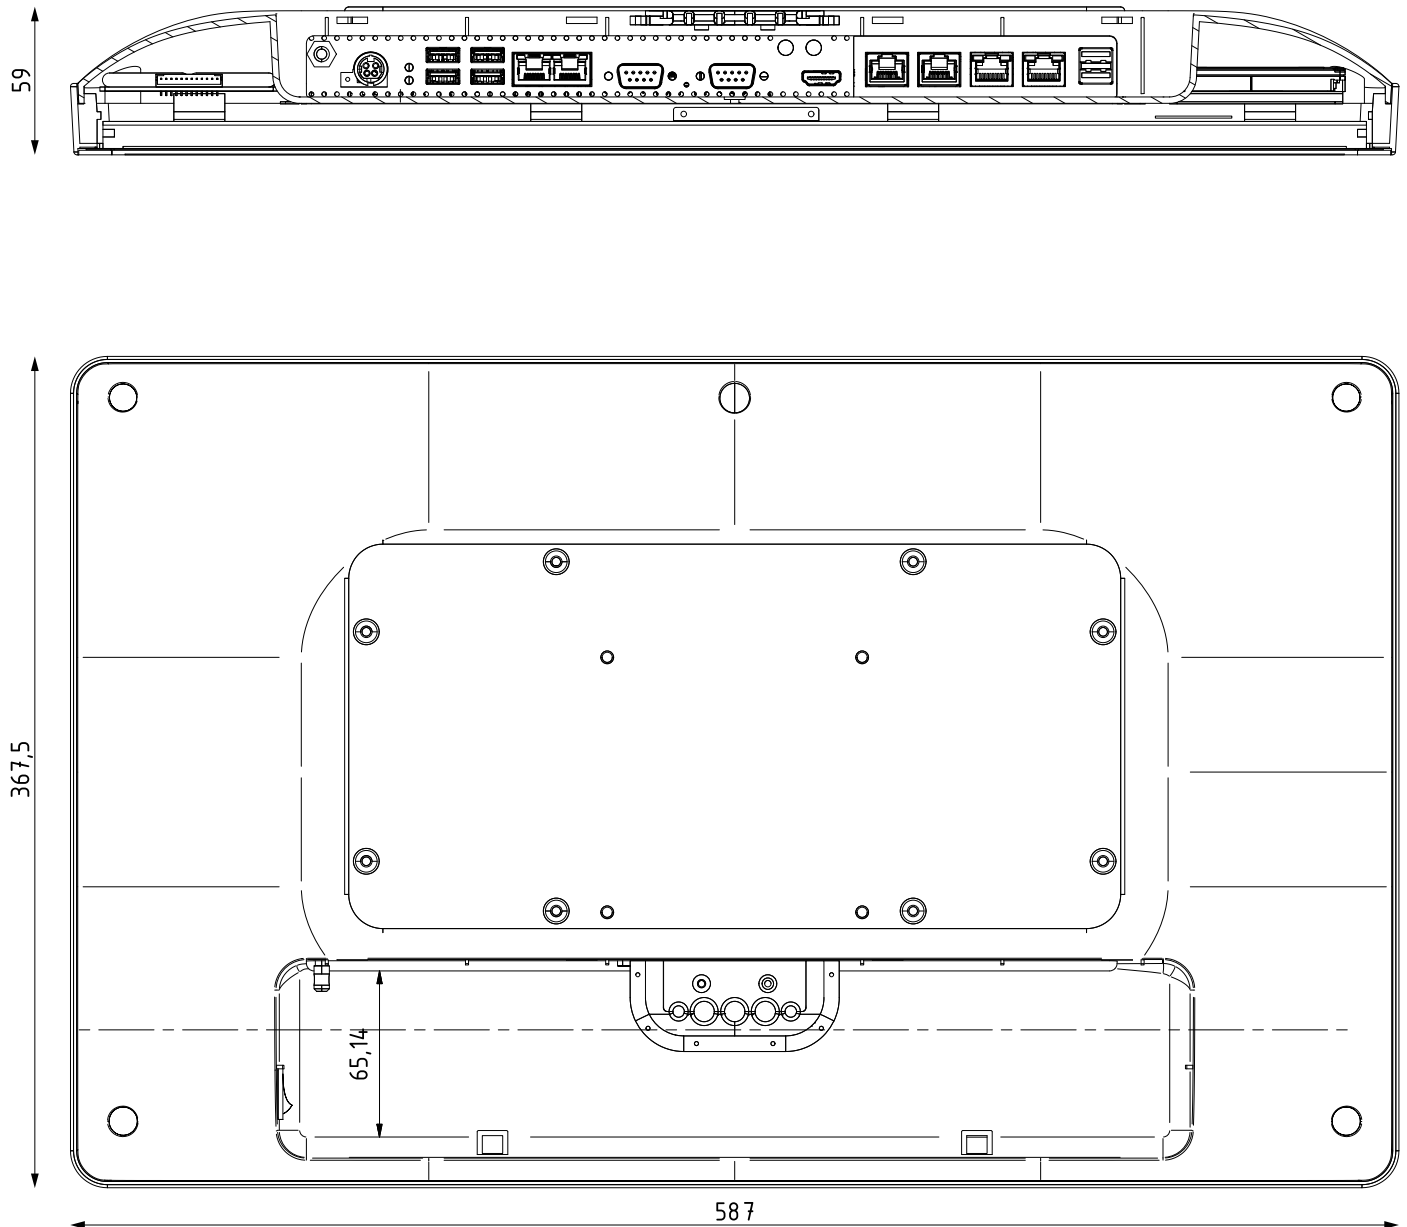

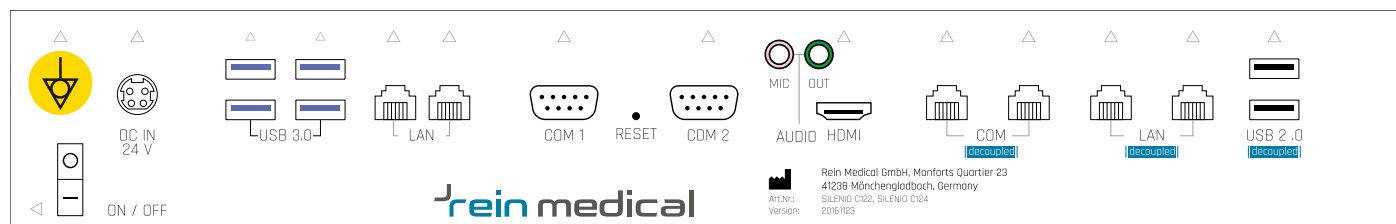

Contactgegevens All Modul



Albert Dehemlaan 31
8900 Ieper
T: + 32 57228181
F: + 32 57208933
www.allmodul.be
info@allmodul.be



67 Rue de Luxembourg
59777 EURAILLE
T: + 33 328 501 840
F: + 33 328 501 774
www.allmodul.fr
info@allmodul.fr



Damzigt 13
3454 PS De Meern
T: + 31 (0)30 2040260
F: + 31 (0)30 2040261
www.allmodul.nl
info@allmodul.nl